


DURO★MAXX




DM9 Series

Economical, high quality, clear floor and floor plate chain-over lifts with dual point lock release, steel pulleys, high strength equalization cables and double telescoping screw pads configured to accommodate the smallest Cars to the SUV's and Trucks. The DM9CF clear floor lift is width adjustable and may be installed in a standard or rotated column configuration. Both lifts come with a one (1) year limited warranty.

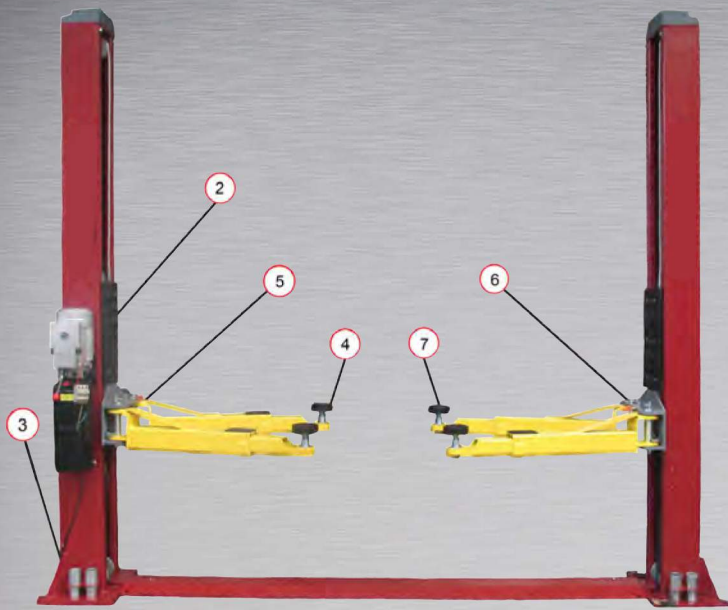

DM9BP
Symmetric
Floor Plate
Two Post Lift

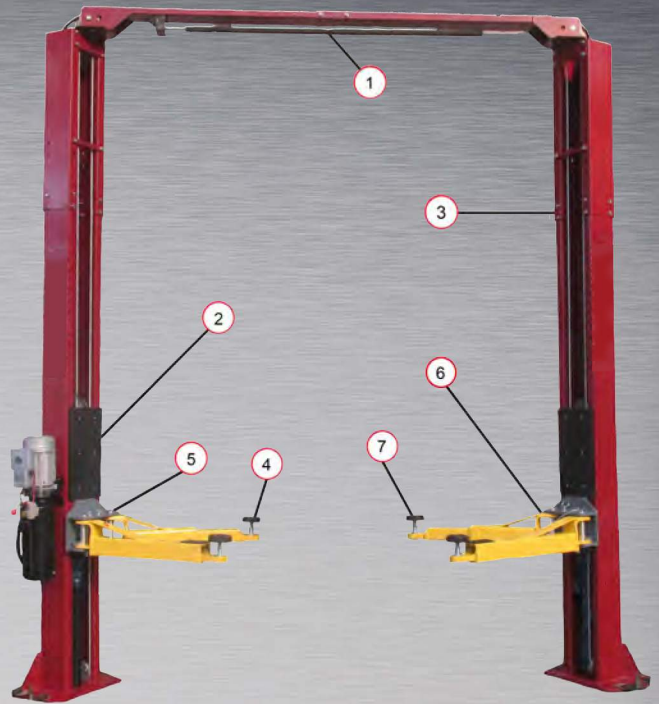

DM9CF
Symmetric/Asymmetric
Clear Floor
Two Post Lift

Blue available for special order



1



2



3



4



5

6




7


DM9 Series

Features & Benefits

- 1 **Adjustable Column Width** - Provides extra 6" of width adjustment for narrow service bays to custom fit your shop (DM9CF Only).
- 2 **Rubber Door Guards** - Provides added security against door damage.
- 3 **Hose Guards** - Protects hydraulic hoses from damage.
- 4 **Stackable Foot Pad Extensions** - Extra tall applications are no problem with the four 3.5" extensions
- 5 **Dual Point Lock Release** - Allows technicians to disengage both column locks independently.
- 6 **Heavy-Duty Arm Restraint System** - Oversize rugged steel gears, pins, and springs for trouble free operation.
- 7 **Double Telescoping Screw Pads** - Used with rubber pads offering 2.5" adjustment for complete vehicle coverage.
- 8 ***Standard Asymmetric** - Lift installed with columns facing each other.
- 9 ***Rotated Asymmetric** - Lift installed with columns offset - rotated.



8



9

Specifications

| | DM9BP | DM9CF |
|----------------------------|---------------------------------|-------------------------------------|
| Capacity | 9,000 lbs | 9,000 lbs |
| Height Overall | 113" | 151" |
| Width Overall w/Power Unit | 133" | Symmetric: 134" Asymmetric: 140" |
| Max. Lift Height | 73" | 73" |
| Width Between Columns | 108" | 108" |
| Min. Pad Height | 4" | 4" |
| Asymmetric/Symmetric | Symmetric | Symmetric/Asymmetric |
| Drive Thru Clearance | 98" | Symmetric: 98" Asymmetric: 95" |
| Lifting Speed | 50 Seconds | 50 Seconds |
| Clear Floor/Floor Plate | Floor Plate | Clear Floor |
| Front Arm Reach | 31.5" - 47.2" | 23.6" - 43.5" |
| Rear Arm Reach | Same | 34" - 54" |
| Narrow Bay Setting | N/A | Deduct 5.9" |
| Max Load Per Arm | 2,250 lbs | 2,250 lbs |
| Cable Diameter | 3/8" | 3/8" |
| Column Size | 11.34" x 7.5" | 11.34" x 7.5" |
| Column Steel Thickness | 6mm | 6mm |
| Carriage Steel Thickness | 6mm | 6mm |
| Arm Steel Thickness | 6mm, 8mm | 6mm, 8mm |
| Ship Weight | 1,380 lbs | 1,500 lbs |
| Ship Dimensions | 113"L x 21-1/2"W x 43"H | 110"L x 24"W x 48"H |
| Power | 208-230 Volt/60hz./Single Phase | 208-230 Volt/60hz./Single Phase |

*Available for DM9CF Only

Additional Height Extensions Available