

DURO ★ MAXX



DM210

2-Post Lift • 10,000 lbs Capacity


Multi Purpose full asymmetric lift that is height and width adjustable and may be installed in a standard or rotated column configuration to accommodate the smallest Cars to the largest SUVs' and Trucks. This ALI/ETL Certified lift comes with a one (1) year limited warranty.







DM210

Features & Benefits

- 1 **Adjustable Column Height** - Provides an extra 6" of height adjustment for ease of installation with various ceiling heights.
- 2 **Adjustable Column Width** - Provides extra 6" of width adjustment for narrow service bays to custom fit your shop.
- 3 **Rubber Door Guards** - Provides added security against door damage.
- 4 **Outer Hose Guards** - Protects hydraulic hoses from damage.
- 5 **Stackable Foot Pad Extensions** - Extra tall applications are no problem with the four 6" tall and four 3" short extensions.
- 6 **Single Point Lock Release** - Allows technicians to disengage both column locks simultaneously.
- 7 **Heavy-Duty Arm Restraint System** - Oversize rugged steel gears, pins, and springs for trouble free operation.
- 8 **Double Telescoping Screw Pads** - Used with or without rubber pads offering 6.5" adjustment for complete vehicle coverage.
- 9 **Standard Asymmetric** - Lift installed with columns facing each other.
- 10 **Rotated Asymmetric** - Lift installed with columns offset - rotated.

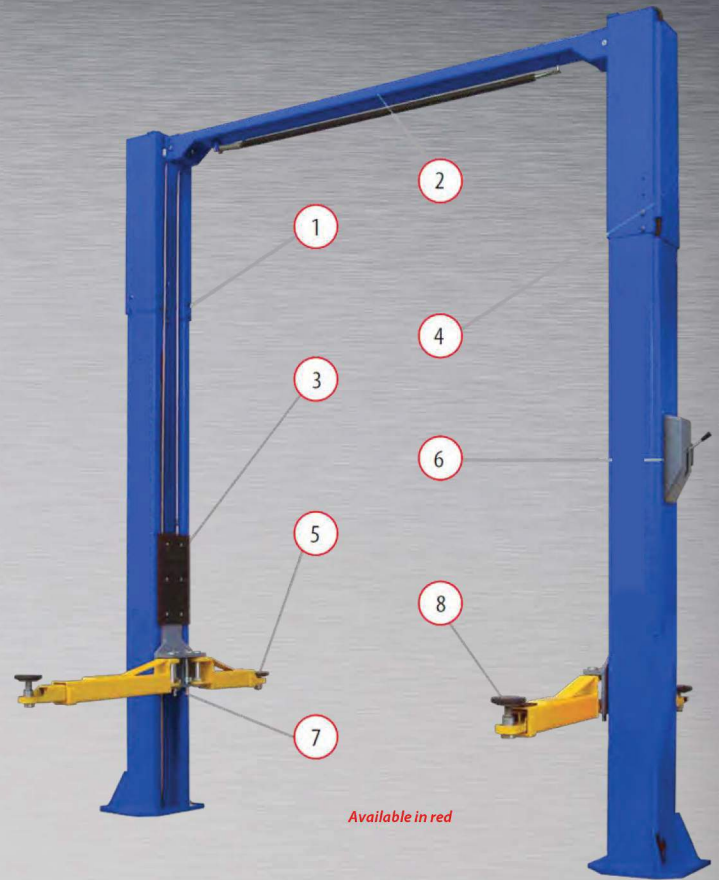

Available in red



Specifications

	DM210 Standard	DM210 Rotated
A. Maximum Lifting Height	76.4" (1940mm)	76.4" (1940mm)
B. Minimum Column Height	143" (3634mm)	143" (3634mm)
C. Cylinder Full Height	145.2" (3688mm)	145.2" (3688mm)
D. Total width	136.6" (3470mm)	137.9" (3502mm)
E. Drive-Thru Clearance	98.4" (2500mm)	92" (2338mm)
F. Floor to Overhead Switch	140" (3556mm)	140" (3556mm)
G. Front Arm Reach (min / max)	23.6" (600mm) / 43.5" (1105mm)	23.6" (600mm) / 43.5" (1105mm)
H. Rear Arm Reach (min / max)	38.6" (980mm) / 61.8" (1570mm)	38.6" (980mm) / 61.8" (1570mm)
I. Screw Pad Height	4" (101mm) to 7.5" (190mm)	4" (101mm) to 7.5" (190mm)
J. Inside Column Width	110.2" (2800mm)	101.9" (2588mm)
Motor	2 HP	2 HP
Voltage	208-230 Volt/60hz./Single Phase	208-230 Volt/60hz./Single Phase
Rise Speed	54 Seconds	54 Seconds
Max. Load Per Arm	2500 lbs (1134 Kilos)	2500 lbs (1134 Kilos)
Min. Ceiling Height Required	143.5" (3644mm)	143.5" (3644mm)
Narrow Bay Setting	Deduct 5.9" (149mm)	Deduct 5.9" (149mm)
Maximum Column Height	149" (3874mm)	149" (3874mm)
Capacity	10,000 lbs	10,000 lbs
Ship Weight	1,570 lbs	1,570 lbs
Ship Dimensions	110"L x 24"W X 48"H	110"L x 24"W X 48"H